




# NEX10 Low Loss Outdoor 38S Cabling Configurations



Contact technical support:  
1-888-201-6073  
[techsupport@jmawireless.com](mailto:techsupport@jmawireless.com)

JMA's premium compression connector, laser-welded jumper, and reusable weather protection products can now be configured to provide a low-loss solution for applications using NEX10 radio equipment such as small cells. Our solution is easily customized to fit your application. The overall configuration, which uses a 3/8" jumper or JMA 38S cable and field-fit connectors, connected to a 1/4" Superflex jumper, is detailed below along with ordering configurations for each. Note that the "B" in the 1/4" jumper part number below represents the unique configuration required for a 1/4" to 3/8" weather-proofed connection.

## 3/8" Factory-Made Jumper Option (as shown below) - JMA 38S cable and field-fit connectors also available

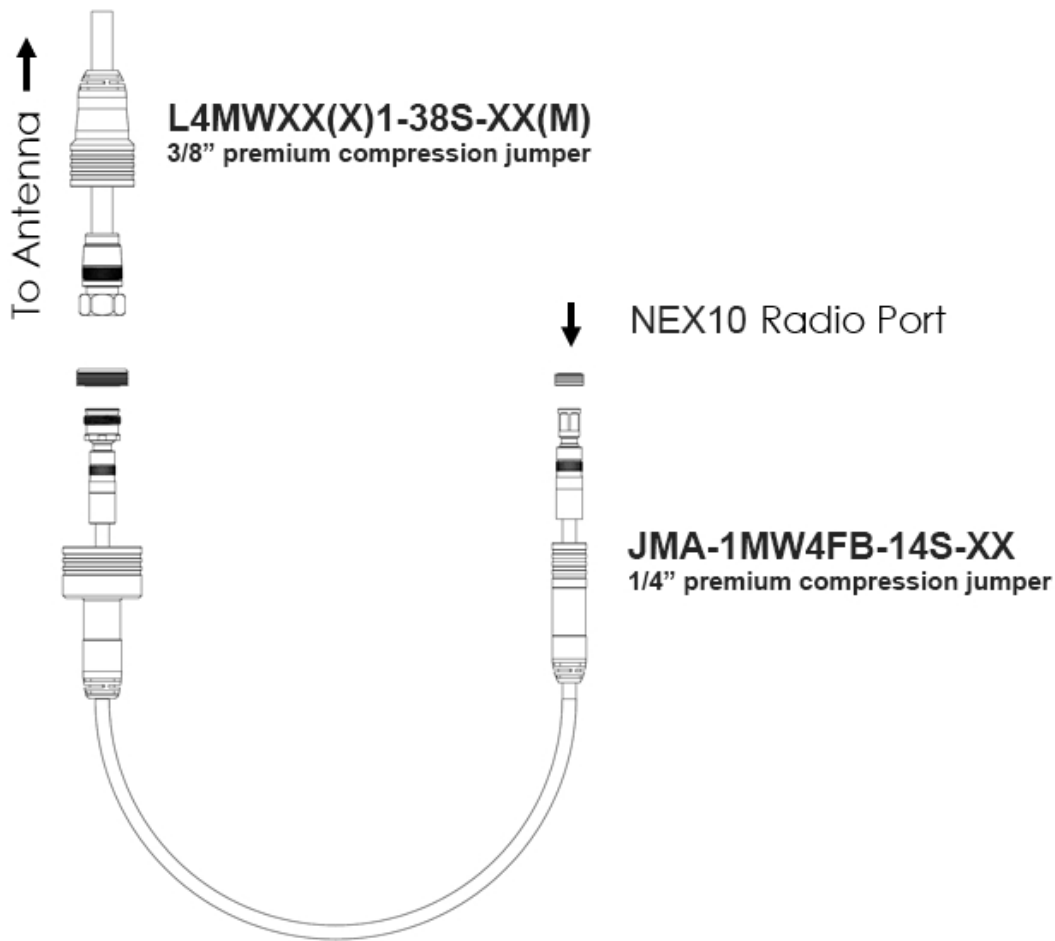

<b>Customer Support</b>		
<a href="#">Jumper performance portal</a>		
<a href="#">Request connector training</a>		
<b>Customer service</b>	1-315-431-7100	customerservice@jmawireless.com

All specifications are subject to change without notice.

©2024 JMA Wireless. All rights reserved. This document contains proprietary information. All products, company names, brands, and logos are trademarks™ or registered® trademarks of their respective holders. All specifications are subject to change without notice. +1 315.431.7100 customerservice@jmawireless.com



JMA's premium compression connector, laser-welded jumper, and reusable weather protection products can now be configured to provide a low-loss solution for applications using NEX10 radio equipment such as small cells. Our solution is easily customized to fit your application. The overall configuration, which uses a 3/8" cable and field-fit connectors connected to a 1/4" cable and field-fit connectors, is detailed below along with ordering configurations for each.

## 3/8" Field Fit Connector and Weatherproofing Options

