

V7CAP-865

Dual Band Vpol Antenna, 96", 65° H-Beams

698-896 MHz


1710-2170 MHz

- Vertical Pol. Antenna
- Dual Band
- Suitable for LTE/CDMA/UMTS/GSM
- Optional Internal Diplexers



Available with Integrated Diplexers

- Reduces mainline cables
- Eliminates external devices



ELECTRICAL SPECIFICATIONS

Frequency Band, MHz	698-896	1710-2170
Horizontal Beam Width, 3dB points	65°	65°
Vertical Beam Width, 3dB points	7.5°	4°
Polarization	Vertical	
Gain @ 698 MHz	16.9 dBi	
Gain @ 896 MHz	17.5 dBi	
Gain @ 1710 MHz	19.1 dBi	
Gain @ 2155 MHz	19.7 dBi	
Electrical Downtilt Range, 2° Increments	0-10° low, 0-6° high band	
VSWR/Return Loss	<1.45:1 / 14.7 dB	
VSWR / Return Loss w/ip	<1.50:1 / 14.0 dB	
Front-to-Back at Horizon	>27 dB	
Upper Side Lobe Suppression	<-18 dB	
Impedance	50 Ohms	
Power Input Per Connector CW, (w)	500	
Power Input Per Connector CW, (no "ip") (w)	500	250
Intermodulation (2x20W)	<-150 dBc	

MECHANICAL SPECIFICATIONS

Input Connector (female)	Back 7/16 DIN or w/bot. opt.
Recommended Connector Coupling Torque	7/16 DIN: 220-265 lbf-in (25-30 N-m)
Antenna Dimensions (LxWxD)	96.0 x 12.5 x 7.1 in (2438x318x180mm)
*Antenna Weight	53 lbs
Bracket Weight	18.2 lbs
RF Distribution	Printed Microstrip Substrate
Radome	Ultra High-Strength Luran
Weatherability	UV Stabilized, ASTM D1925
Radome Water Absorption	ASTM D570, 0.45%
Environmental	MIL-STD-810E
Wind Survival	150 mph
Front Wind Load @100mph	236.5 lbf
Equivalent Flat Plate @100mph	4.81 sq-ft. (c=2)
Mounting Brackets (919011)	Fits 3.5 Inch Max. O.D. Pipe
Mechanical Downtilt Range	0-6°
Standard Bracket Kit	P/N 919032 (Included)
Clamps/Bolts	Galvanized Steel/Stainless Steel





ORDER INFORMATION

MODEL	DESCRIPTION
V7CAP-865-xy	"xy" is a placeholder for the built-in fixed electrical down tilt in degrees, "x" for low band, y for high band.
V7CAP-865-xyip	to add the option for integrated duplexers, add "ip" to model number
V7CAP-865-xyip-bot	for bottom mounted connectors, add "-bot" (otherwise antenna comes standard with back mounted connectors)
919049	Optional Bracket Kit, 3-Point, 6 degree D-tilt, For 4.5" OD Pole

*Antenna Weight may vary slightly with options.

Mechanical Drawing

Notes:
 1. Dimensions are in Inches [Millimeters].
 2. Refer to the Electrical & Mechanical Spec Sheet for further details.

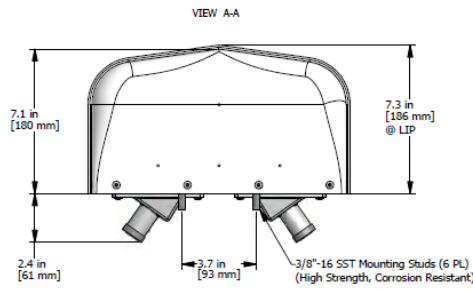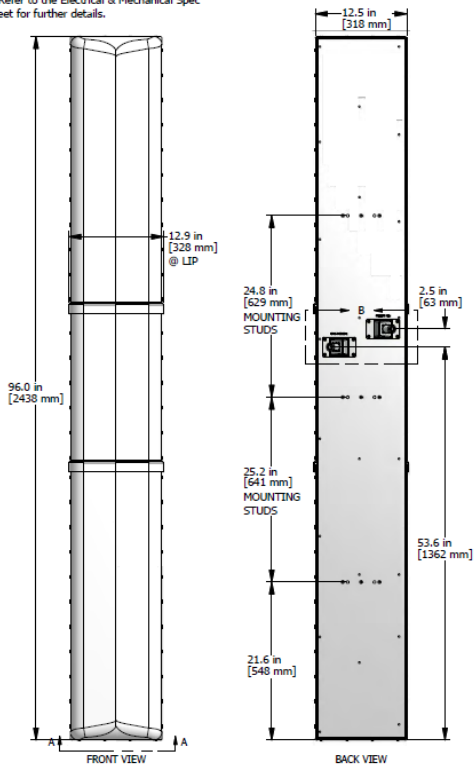

Recommended Connector Coupling Torque
 716 DIN: 220-265 lbf-in (25-30 N-m)
 Type N: 12-15 lbf-in (1.4-1.7 N-m)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		NAME	DATE		CSA ANTENNA, INC. 200 CALLEJA BLVD SUNNYVALE, CA 94086 PH: 415-961-1000 FAX: 415-961-0888
TOLERANCES ON XXX & 0.005 - 0.010 XXX & 0.010 - 0.015 ANGLES & 3°		DESIGNER	DATE		
THIRD ANGLE PROJECTION		E. SHAW		V7CAP-865	
THIS DRAWING AND THE INFORMATION CONTAINED HEREIN ARE THE PROPERTY OF CSA ANTENNA, INC. AND SHALL NOT BE REPRODUCED OR USED IN ANY WAY WITHOUT WRITTEN PERMISSION.		REV	DESCRIPTION	DATE	BY
		D	970865-AD		
		SCALE	FILE	1 OF 1	